


B-6000-0900-1

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. Face is solvent bonded to case with ABS pipe cement.
2. To assure proper contact with pc board traces 6-32 nuts are torqued to 12 in-lbs minimum.
3. Open holes in molded case by drilling with a #28 drill.

SYM	APPROVED	DATE
C	Corrected Spelling in note 1 PCD 2000-8 SM	10/10/00

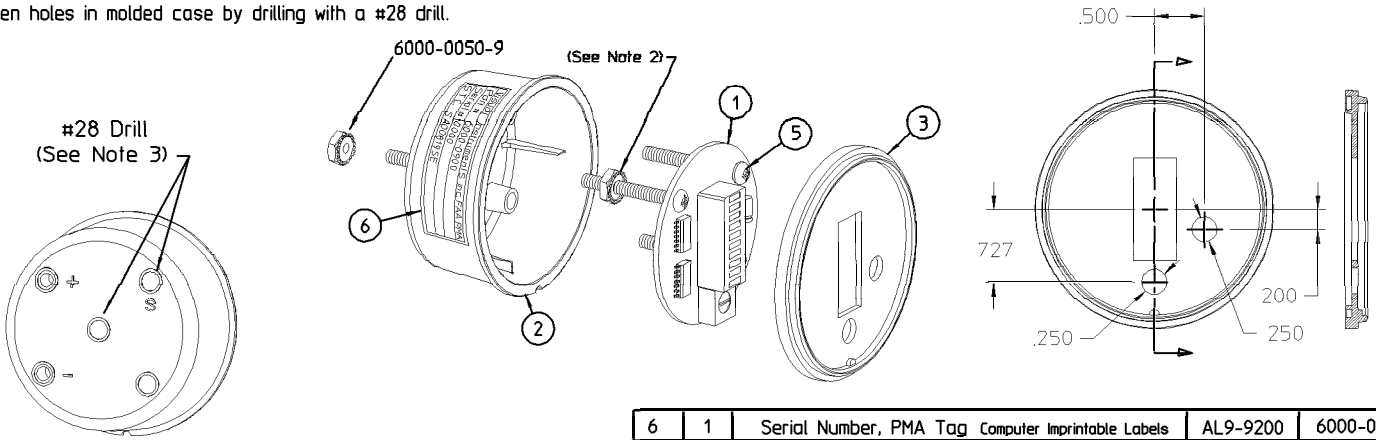

6	1	Serial Number, PMA Tag	Computer Imprintable Labels	AL9-9200	6000-0900-6
5	4	6-32 x1.125 Screws	Pan 18-8	Portland Screw	6000-0900-5
4	7	6-32 KEPS NUTS	1/4 A.F 18-8 SS	Portland Screw	6000-0050-9
3	1	Face			3000-2100
2	1	Case			3000-2200
1	1	PC Assembly			6000-0300

UNLESS OTHERWISE SPECIFIED	
• DIMENSIONS ARE IN INCHES	
• THIRD ANGLE PROJECTION	
• TOLERANCES	
.XXx.XZ	STRIKE OUT OR FILL IN AS NEEDED
.XXx.X10	
DO NOT SCALE THIS DRAWING	

ITEM	QTY.	PART/MATERIAL-DESCRIPTION	Vendor	Vendor Part Number	Visual Part Number
DRAWN BY		Steve Mahoney	DATE		
ENGINEER/CHECKER		Steve Mahoney	06/05/95		
RELEASE TO PROD.			TITLE		
FILE		6000-0900_rev_c	FULL SCALE	1 SHEET	1 OF
			PART NUMBER		6000-0900
			Visual Instruments, Inc.		
			B-6000-0900-1		

THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION THAT IS VISUAL INSTRUMENT'S (VI) PROPERTY. DO NOT DISCLOSE TO, OR DUPLICATE FOR, OTHERS EXCEPT AS AUTHORIZED BY VI.